




CLEANING PROCEDURE FOR NGAGE POWERPARTS HYPER FLOW AIR FILTERS

Once after every 15,000 Kms N-Gage Air Filters need cleaning and recharging process to restore your air filter to alike new condition. Cleaning your N-Gage Air Filter is simple when following the below 4 easy steps.

STEP 1 – SOAK DIRTY AIR FILTER WITH DILUTED SOAP OIL FOR 20 MINS

First prepare diluted washing liquid by squeezing N-Gage Soap oil (5-10 ml / 2 Liters) and stir with normal cold water to prepare Air filter cleaning liquid, Then Soak the Dirty Air Filter into soap water for 20 mins to make the dirt particles loosen up . Then continue scrubbing gently with old tooth brush inside and outside (Both Sides) , continue to rinse the filter until all traces are gone. It may be necessary to repeat the above steps.



STEP 2 - RINSE YOUR AIR FILTER WITH COOL LOW PRESSURE WATER



Rinse off your air filter with cool low-pressure water applied to the clean side out in order to flush the dirt out of the filter, Continue to rinse the filter until all traces are gone.

STEP 3 - DRY YOUR N-GAGE HYPERFLOW AIR FILTER

After rinsing your filter, gently shake off the excess water and only allow filter to dry naturally. Do Not apply N-Gage Recharge Oil Until the air filter is completely dry.


NOTE:

1. Do not Dry the filter with compressed air to remove excess water.
2. Do not use Hair dryers to make the process fast as they damage the fibre properties and construction.

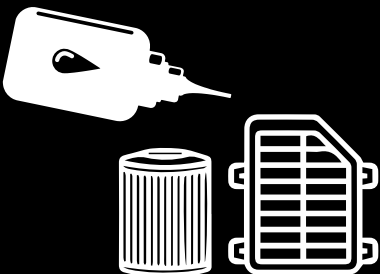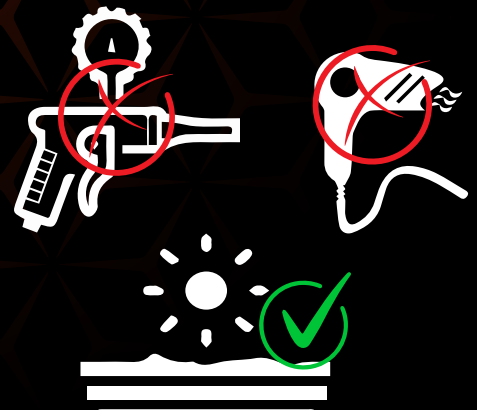

STEP 4 – APPLY N-GAGE AIR FILTER OIL

Apply N-Gage Recharge Oil evenly along the crown of each pleat. Allow the oil to penetrate for approximately 20 minutes then touch up any light areas on either side of filter until there is uniform red colour at all areas.

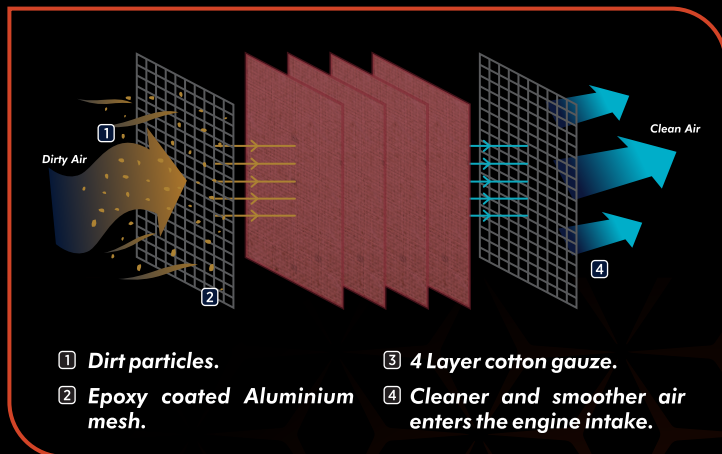

Our Hyperflow Air Filters are made out of 4 Layer Surgical Grade Cotton Gauze sandwiched between epoxy coated Aluminium mesh provided with support pillars for superior Strength & Durability for lifetime, and to ensure the best filtering efficiency @ 99% + with increased power and torque.

AIR FLOW PROCESS

- Dirty and turbulent air enters the filter.
- Our hyper flow Air filter is pre-oiled with special lubricant which creates static and attracts dust particles down to 5 microns.
- As a result cleaner and smoothened air enters the Engine intake.

BENEFITS OF USING AIR FILTER

- Factory Pre-Oiled Air Filters
- Increased Throttle Response
- Direct stock replacement
- Optimum filtering efficiency
- Extensively tested on all terrains
- Designed with support pillars for best durability
- Eco - Friendly product



**WASHABLE
AND
REUSABLE**



**BEST
DURABILITY**



**UPTO 30% INCREASED AIR
FLOW THAN STOCK FILTER**



**HASSLE FREE
INSTALLATION**



**1,00,000 KILOMETERS
REPLACEMENT WARRANTY**



**ECO - FRIENDLY
PRODUCT**



**100% ORGANIC COTTON
AS FILTERING MEDIA**



**EXTENSIVELY TESTED
ON ALL TERRAINS**



**FOR
MORE
INFO**

Brand Owned & Marketed By

VELMURUGAN AGENCY,

#7, Santhai Pettai East Road-4,
Komarapalayam - 638 183.
Contact Us : +91 94440 94000
sales@velmuruganagency.in
www.ngagepowerpart.com

Like & Review us

f **@** /ngagepowerparts